



Compressor
Voltage Code : FZ

AE4440Y-FZ1A


High Temp. Commercial (HP)

220 - 240V 1~ 50 Hz

R134a

AE4440Y-FZ1A_BF

Conditions	Frequency	Nominal Cooling Capacity		Sound Power ISO3745 / ISO 3743-1
		Watts	BTU/h	
EN12900 / R134a	50 Hz	899	3065	52 dBA

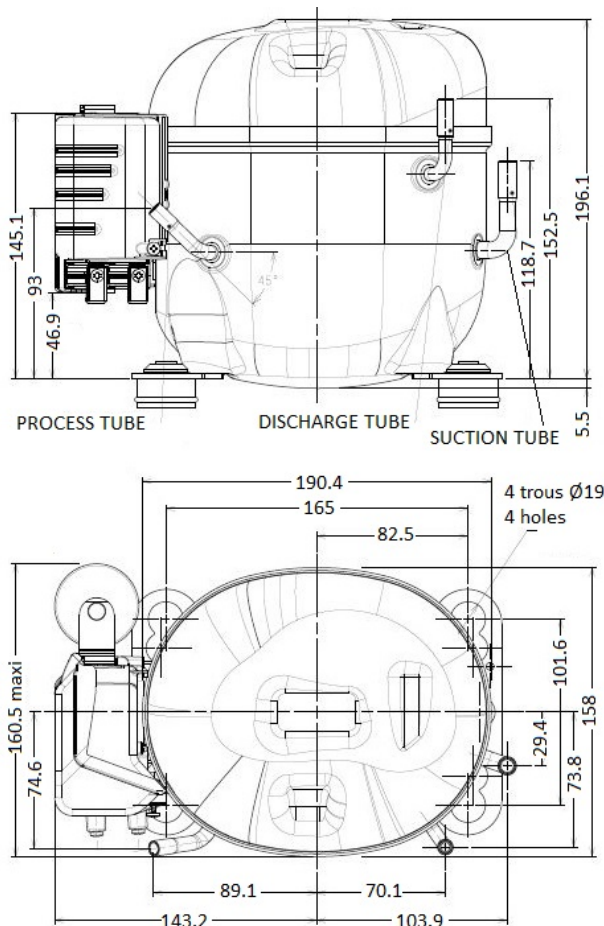

* EN12900 : T°Cond. 50.0°C / T°Evap. 5.0°C / T°Return gas temp.. 20.0°C
T°Subcooling. 0.0K

Certificates :



Displacement (cc)	10.33
Net Weight (Kg)	9.8
Oil Quantity (cc)	280.0
Oil Type	Polyolester
Expansion Device	Capillary_Tube/Expansion_Valve
Cooling	Fan
Main Winding (Ohm)	8.1
Start Winding (Ohm)	18.3
Current	
RLA (A)	2.5
MCC (A)	3.7
LRA (A)	13.2
Electrical Equipment	CSIR
Overload	T0759
Time Check	2.8s - 5.2s / 14.5 A
Open Temp	145° C
Close Temp	61° C
Start Capacitor	88 µF / 250 V
Current Relay	MTRP0029
Pick Up	7,7A
Drop Out	6,5A
Refrigerating connection for OD	
Suction Tube	7.9 (5/16")
Discharge Tube	6.35 (1/4")
Process Tube	6.35 (1/4")


Note : Tecumseh reserves the right to change information contained in this document without notification.



Tecumseh

AE4440Y-FZ1A	Tension FZ : 220 - 240V 1~ 50 Hz
---------------------	---

Les performances sont données dans les conditions EN12900 :	Gaz aspirés :	20.0 °C
Condition Dew	Sous refroidissement :	0.0 K
The performance data are in EN12900 conditions :	Return gas :	20.0 °C
Dew Condition	Subcooling :	0.0 K

50 Hz R134a											
											
										N°3061	
4 T condensation	5 T évaporation	(°C)	-25	-20	-15	-10	-5	0	5	10	15
30	1 P frigorifique	(Watt)	290	380	488	619	775	960	1176	1426	1715
	2 P absorbée	(W)	209	231	253	276	298	318	336	351	363
	3 I absorbée	(A)	1.99	2.01	2.04	2.09	2.15	2.21	2.29	2.39	2.49
40	1 P frigorifique	(Watt)	249	332	429	545	684	847	1038	1260	1517
	2 P absorbée	(W)	217	241	266	293	321	348	375	399	422
	3 I absorbée	(A)	1.90	1.94	2.00	2.06	2.14	2.23	2.33	2.44	2.56
50	1 P frigorifique	(Watt)		283	369	471	591	733	899	1093	1317
	2 P absorbée	(W)		254	281	312	344	378	412	446	478
	3 I absorbée	(A)		1.94	2.01	2.09	2.19	2.30	2.42	2.55	2.70
60	1 P frigorifique	(Watt)			311	398	499	619	760	926	1118
	2 P absorbée	(W)			303	336	373	412	453	495	537
	3 I absorbée	(A)			2.08	2.19	2.30	2.43	2.57	2.72	2.89

© 2019 Tecumseh Products Company
All rights reserved

1 = cooling capacity 2 = power input 3 = current 4 = condensing temperature 5 = evaporating temperature

Nota : Tecumseh se réserve le droit de modifier les informations contenues dans ce document sans préavis.
Note : Tecumseh reserves the right to change information contained in this document without notification.